




UNION INK™

**MASTER COLOR CARD
FOR SCREEN PRINTING INK**

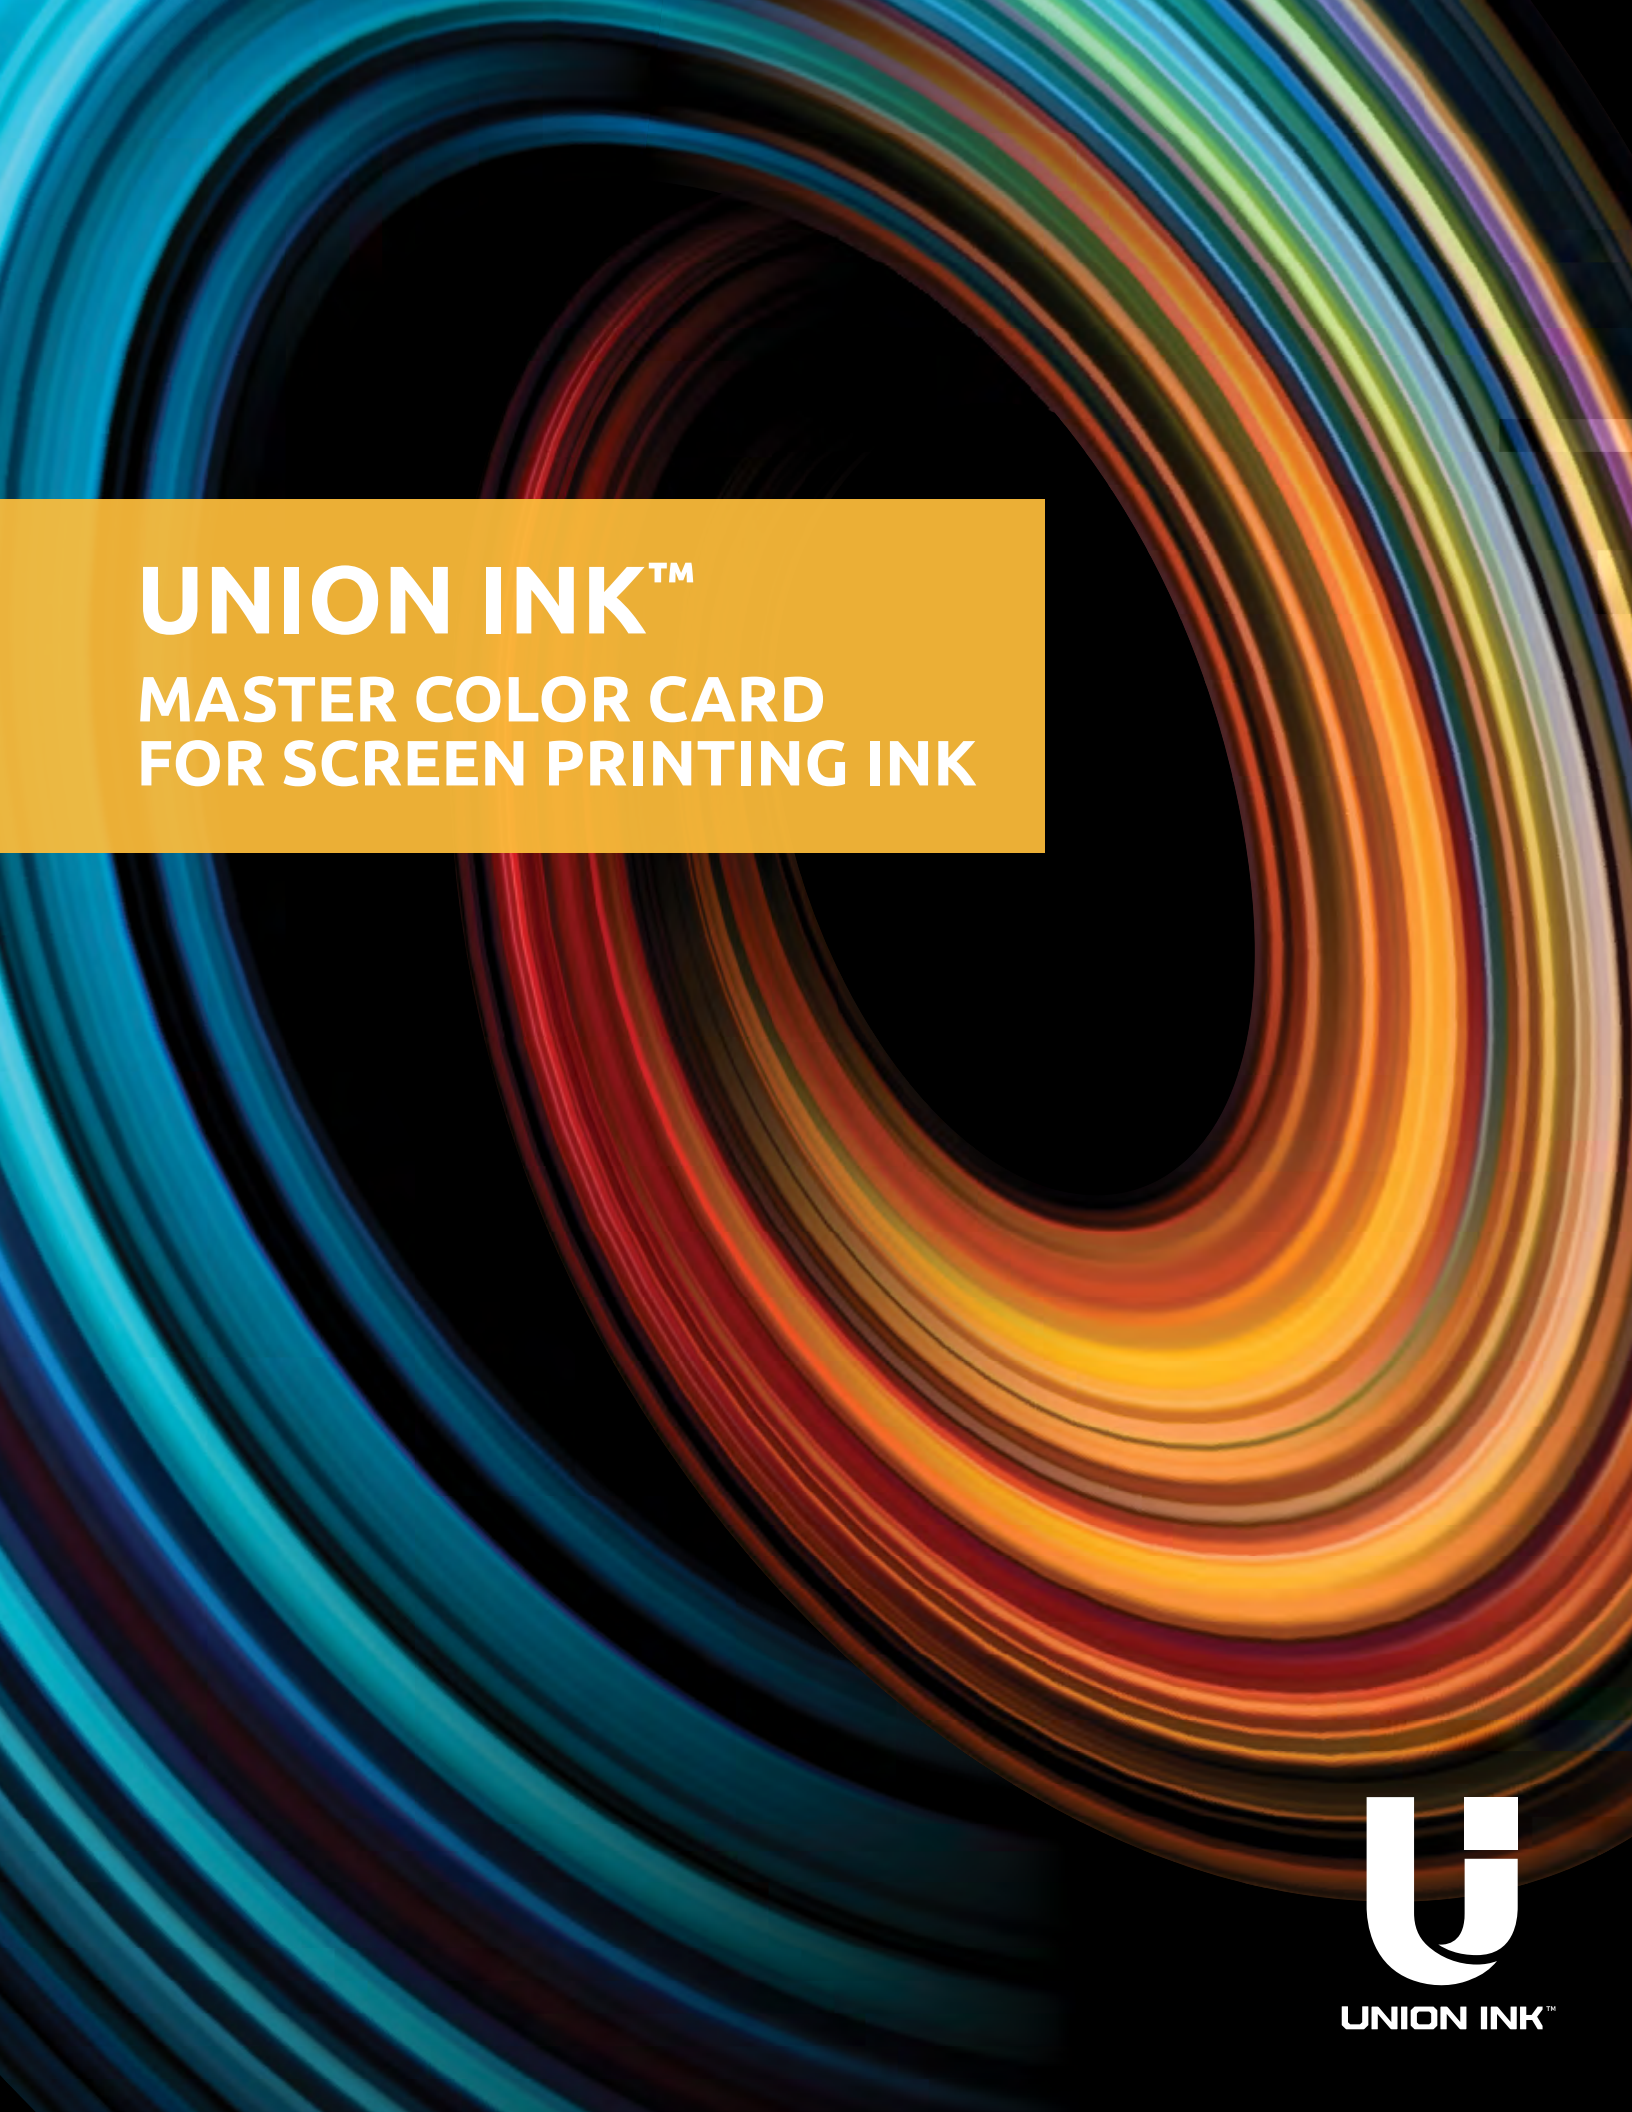

UNION INK™

Standard and Athletic Plastisol Colors - カーソルを見本に合わせると *Pantone* 番号が表示されます

Lemon Yellow M, P, U	Chrome Yellow M, P, U	Golden Yellow M, P, U	Orange M, P, U	Flag Red P
Scarlet Red M, P, U	Brite Red M, P, U	Cardinal Red M, P, U	Maroon M, P, U	Cool Pink P
Deep Purple M, P, U	Navy P, U	Light Navy M, P, U	Royal Blue M, P, U	Mono Blue M, P, U
University Blue P	Brite Blue M, P, U	Peacock Blue M, U	Aqua Marine M, P, U	Lime Green M, P, U
Brite Green M, P, U	Kelly Green M, P, U	Chrome Green M, P, U	Sienna Brown M, P, U	Khaki M, P, U
Cream U	Vegas Gold 終売 P	Light Grey M, P, U	Dark Grey M, P, U	Grey P, U

100

1. *Journal of the American Academy of Child and Adolescent Psychiatry*, 41, 10, 1245-1252.

100



--

10
11

M – Maxopake (PADE)
O – Mixopake (MIXE)
U – Ultrasoft (PLUE)
P – Polyester Low Bleed (ATHP)

UNION INK

Maxopake Plastisol (PADE) Union Inkが提供する最も隠ぺい力の高いインクです。限られた一部のカラーはコットン/ポリ混紡素材に印刷できるよう耐ブリード性があります。

Mixopake Plastisol (MIXE) はPantone®カラーを再現できる、多用途で印刷しやすい隠ぺい力の高いインクです。

Polyester (ATHP) はブリードしやすい生地に使用できる耐ブリード性と高い隠ぺい力を兼ねそろえたインクです。

Ultrasoft Plastisol (PLUE) は汎用性の高い柔らかなインクです。中程度の隠ぺい性でダイレクトプリント、転写プリントの両方でご使用頂けます。

・カタログに掲載の色見本は、お使いのモニター環境や印刷条件により、実際の色とは異なって見える場合がございます。ご使用の際は、必ず現物のインクで色をご確認ください。

日本総代理店 吉川化工株式会社

For more information about
Union Ink colors, visit unionink.com.



www.avient.com



Copyright © 2023, Avient Corporation. Avient makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as "typical" or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. Avient makes no warranties or guarantees respecting suitability of either Avient's products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. AVIENT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.